



Fastening
system using
Fixings

26

raw material

U60X

colour

Natural



For indoor wiring

- Insulating material.
- **Halogen free.**
- Good mechanical resistance.
- Easy mounting.
- **High performance.** Good tensile strength.
- Certified product acc./IEC 62275*.

Raw material






Fixings




Compliant




Technical characteristics

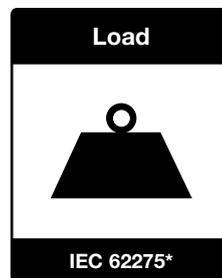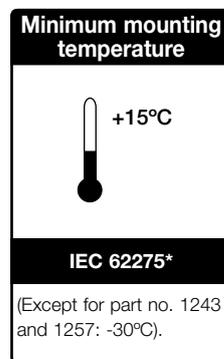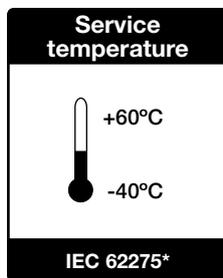

Compatible with Cable ties 22

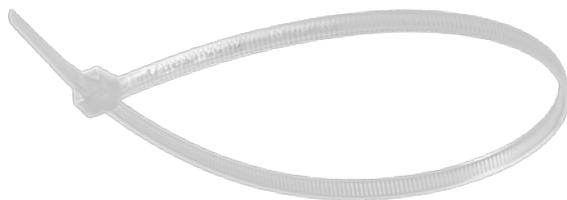

* The values indicated according to IEC 62275 have been tested under the equivalent standard EN 62275. BS EN 62275 is the UK implementation of EN 62275 and IEC 62275.

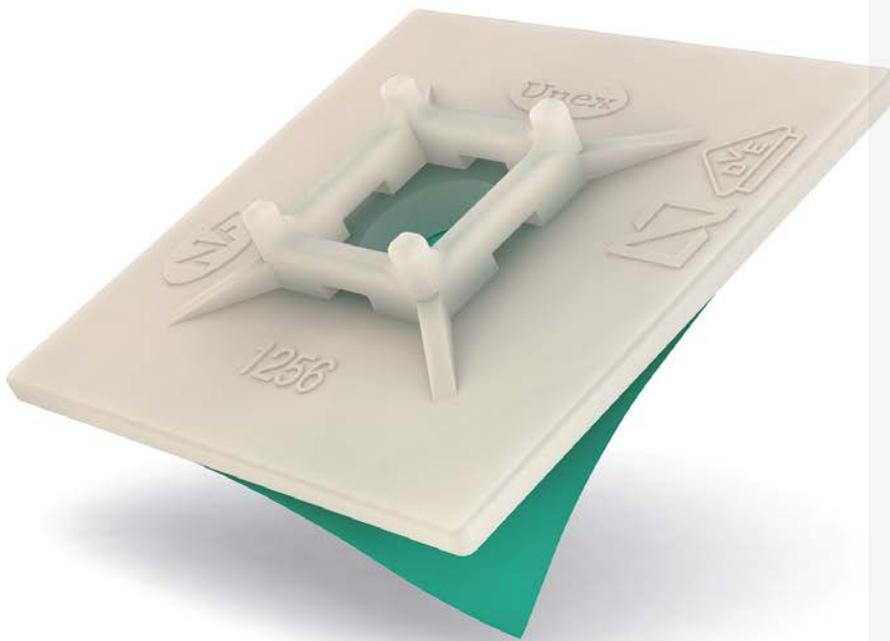

Colour

Natural

Quality marks





See updated technical information of each part number on www.unex.net

Conformity declaration



Fixings

		U60X Natural	
	Screw mount ØM4		1243
	Self-adhesive mount A = 19 mm B = 3 mm		1254 (1)
		A = 30 mm B = 5 mm	1256 (2)
	Angle mount ØM4 or M5		1257
	Cable clamp Ø4 to 17 mm		1201
		Ø15 to 33 mm	1202

(1) Part no. 1254 is equipped with a hole to assure excellent fixing with a screw M3.

(2) Part no. 1256 is equipped with a hole to assure excellent fixing with a screw M4.