

MECHANICAL CHARACTERISTICS

Outer Diameter, inch (mm)	0.092 (2.34)
Minimum Bend Radius, inch (mm)	0.13 (3.18)
Flexures	5,000
Weight, grams/ft. (meter)	5 (5)

ELECTRICAL CHARACTERISTICS

Impedance(ohms)	50
Frequency Range (GHz)	0.05 - 18
Velocity of Propagation	77%
Capacitance, pF/ft. (pF/meter)	26.2 (85.96)
Shielding Effectiveness, dB @ 1GHz	>100
Maximum Insertion Loss , dB/ft. (dB/meter)	Frequency

1.0 GHz
10.0 GHz
18.0 GHz
26.5 GHz
40.0 GHz
50.0 GHz

Insertion Loss per Catalog
0.2 (0.66)
0.67 (2.2)
0.92 (3.02)
N/A ()
N/A ()
N/A ()

Phase Stability Versus Flexure	10 GHz: 2 ⁰
	18 GHz: 2.5 ⁰
VSWR	Based on connector selections.


ENVIRONMENTAL CHARACTERISTICS

Temperature Range(Deg C)	-65/+165
--------------------------	----------

MATERIALS

Outer jacket	Fluorinated Ethylene Propylene (FEP)
Braid	SPC Alloy Braid
Outer Conductor	Silver plated copper tape
Dielectric	LD PTFE
Center Conductor	Solid Wire


CUTAWAY

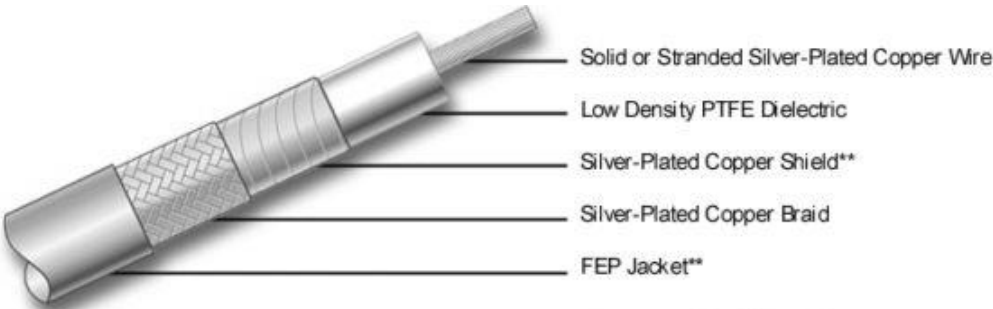

**Not typical for UGN070D


CHARTS

MAXIMUM INSERTION LOSS

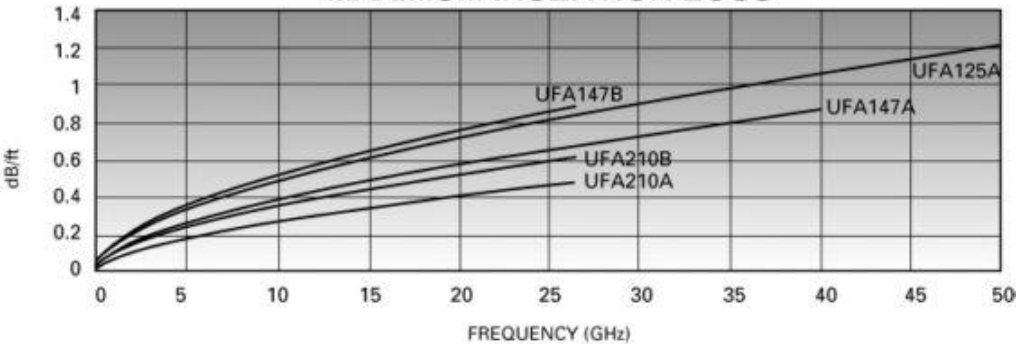

Insertion Loss Chart

Phase Chart

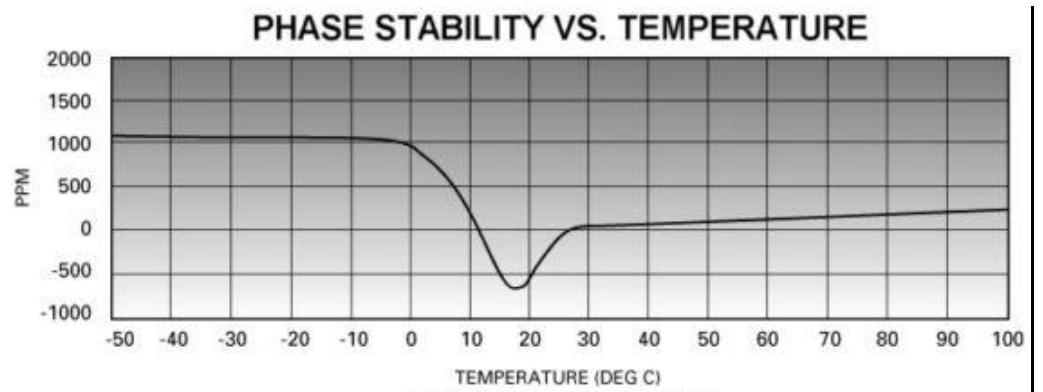

Power Chart

Average Power Handling, Watts CW at 20 degrees Celsius and Sea level

